


AS200

Ultra low oil-bleeding Thermal Conductive Gel

LiPOLY AS200 is a material for gap filling. The thermal conductivity is 2.0W/m*K. The hardness is Shore 00/30, with highly flexible, highly compressed, and less oil-bleeding, which can avoid the electronic component polluted by silicon oil, or makes the dust stick on it, to keep it nice and clean. The product is qualified for UL and ROHS.

LiPOLY's ability of research and development is providing our best thermal solution to customers, which can satisfy customer special requirement on advanced product.

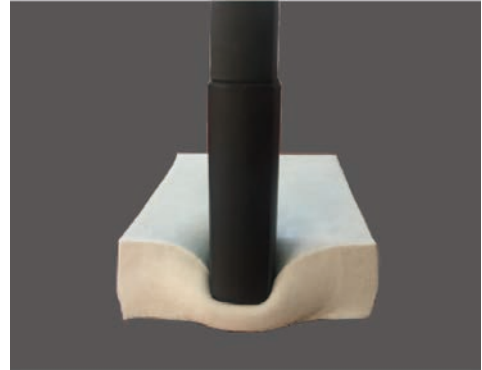

Features-

- Thermal conductivity: 2.0W/m*K
- Super soft
- High compressibility
- Low-oil bleeding
- Naturally tacky and high resilience

Typical Applications-

- Notebook computers
- Heat pipe assemblies
- TV hardware
- Wireless communication hardware
- High speed mass storage drives
- Set top box • IP CAM

Specifications-

- Sheet form
- Die-cut parts

PROPERTY	AS200	TEST METHOD	UNIT
Color	Greyish white	Visual	-
Surface tack 2-side/1-side	2	-	-
Thickness	0.5~12	ASTM D374	mm
Density	2.2	ASTM D792	g/cm ³
Hardness	30	ASTM D2240	Shore 00
Application temperature	-60~180	-	°C
COMPRESSION			
Deflection @10 psi	12	-	%
Deflection @20 psi	23	-	%
Deflection @30 psi	33	-	%
Deflection @40 psi	40	-	%
Deflection @50 psi	44	-	%
ELECTRICA			
Dielectric breakdown	>13	ASTM D149	KV/mm
Surface resistivity	>10 ¹¹	ASTM D257	Ohm
Volume resistivity	>10 ¹⁰	ASTM D257	Ohm-m
THERMAL			
Thermal Conductivity	2	ASTM D5470	W/m*K
Thermal impedance@10 psi	1.01	ASTM D5470	°C-in ² /W
Thermal impedance@20 psi	0.92	ASTM D5470	°C-in ² /W
Thermal impedance@30 psi	0.84	ASTM D5470	°C-in ² /W
Thermal impedance@40 psi	0.75	ASTM D5470	°C-in ² /W
Thermal impedance@50 psi	0.70	ASTM D5470	°C-in ² /W
FLAME RATING			
UL Flammability class	V-0	UL94	-

※ These data are provided for reference only. Engineers are reminded to test the material in varied application.